



19" Rear Mount Display

Art.Nr.: 504.581901

Details:

Display Type	4:3 Ratio 19" Rear Mount TFT LCD
Synchronization Range	30-80 KHz horizontal, 60-75Hz Vertical
Max. Resolution	1280 x 1024
Brightness (cd/m ²)	300
Contrast Ratio	800:1
LCD Color	16.7M
Pixel Pitch (mm)	0.294(H) x 0.294 (V)
Viewing Angle (V-H)	160° (H), 160°(V)
Active Area	376 x 301mm
Display Response Time	8ms, Rise + Fall (Typically)
Backlight Lamp life	50,000Hrs
Operation Temperature	0-40°C
Storage Temperature	-20°C-60°C
Operating Humidity	10%-90% non condensing
Storage Humidity	5%-90% non condensing
Power Consumption	50 Watt max.
Input Video Format	Analog (VGA)
Dimensions (W x H x D)	425,7 x 353,7 x 53mm
Weight	4,6kg

Touch Technology	Surface Acoustic Wave (SAW) 6mm Glass!
Protection	IP64 frontside
Touch Response Time	10,4ms/10ms
Touch Sensitivity	Fixed
Touchscreen Interface	USB or serial (RS232)

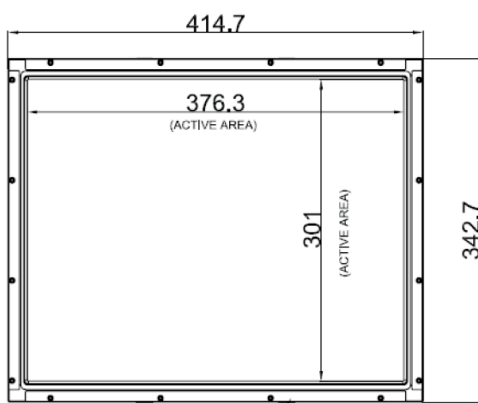

Customer Panel Cut-Out: 384 x 308,7 - R6

Pending IP64 Glue Seal at Bezel Edge

REAR MOUNT WITH BRACKETS
HORIZONTAL OR VERTICAL

