





## 32" Rear Mount Display Widescreen

Art.Nr.: 504.583200


### Details:

Display Type	16:9 Ratio 32" Rear Mount Touch LCD
Synchronization Range	48 KHz horizontal, 60Hz Vertical
Native Resolution	1366 x 768
Brightness (cd/m <sup>2</sup> )	500
Contrast Ratio	3000:1
LCD Color	16.7M
Pixel Pitch (mm)	0.511(H) x 0.170 (V)
Viewing Angle (V-H)	178° (H), 178°(V)
Active Area	697.68 x 392.26mm
Display Response Time	16ms, Rise + Fall (Typically)
Backlight Lamp life	50.000Hrs
Operation Temperature	0-40°C
Storage Temperature	-20°C-60°C
Operating Humidity	10%-90% non condensing
Storage Humidity	5%-90% non condensing
Power Consumption	124 Watt max.
Input Video Format	Analog (VGA) & DVI
Dimensions (W x H x D)	826 x 516 x 115mm
Weight	19kg

Touch Technology	Surface Acoustic Wave (SAW) 4mm Glass!
Protection	IP64 frontside
Touch Response Time	10,4ms
Touch Sensitivity	Fixed
Touchscreen Interface	USB & serial (RS232)

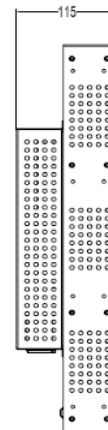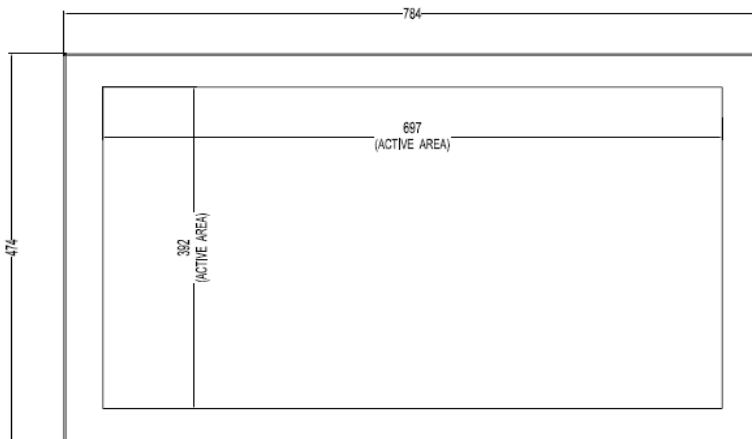

Customer Panel Cut-Out: 809 x 500 - R6

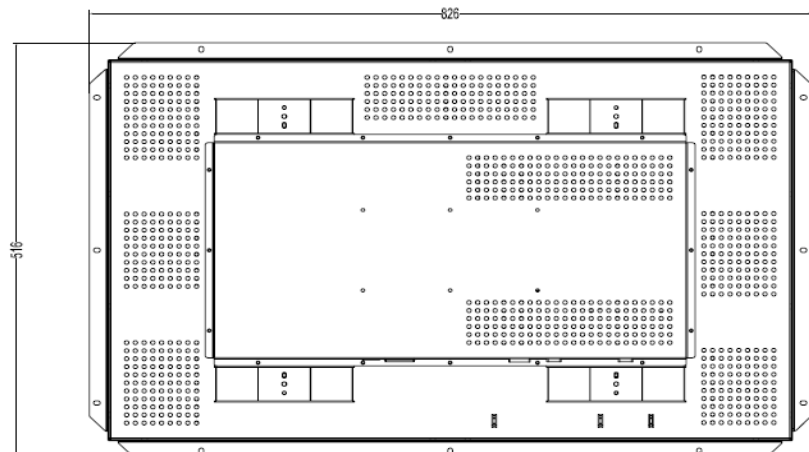

R3  
24x