

## 19" open frame Display transflective

Art.Nr.: 510.251900

### Details:



LCD Size	19" TFT Active Matrix Panel
Max. Resolution	1280 x 1024
Brightness (cd/m <sup>2</sup> )	520 - 880
Contrast Ratio	1000:1
LCD Color	16.7M (8bit/colors)
Pixel Pitch (mm)	0.294(H) x 0.294 (V)
Viewing Angle (V-H)	+80°~-80° (H), +80°~-80°(V)
Active Area	376.32 (H) x 301.06 (V)mm
Operation Temperature	0-50°C
Interface	VGA
Synchronization Range	31.5~80.0KHz (H) /60~75Hz (V)
Signal Connectr	15 pin D-Sub
Power Consumption	35W typical, normal operation
Power Source	AC 100~240V, Universal, +/-10%
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Dimensions (W x H x D)	445 x 355 x 110 mm
Net Weight	5,6kg

### Optional: Interface

S-Video, Composite, DVI

510.251901  
510.251902

incl. Infrared Touchscreen USB  
incl. Infrared Touchscreen RS232

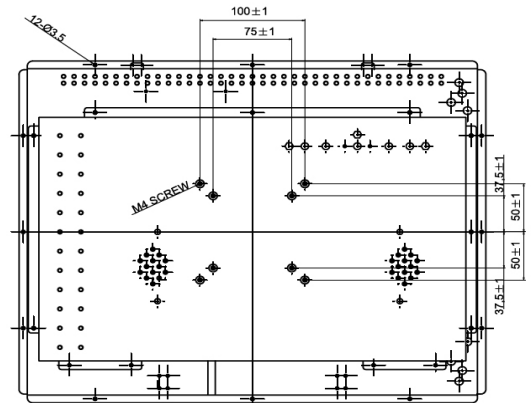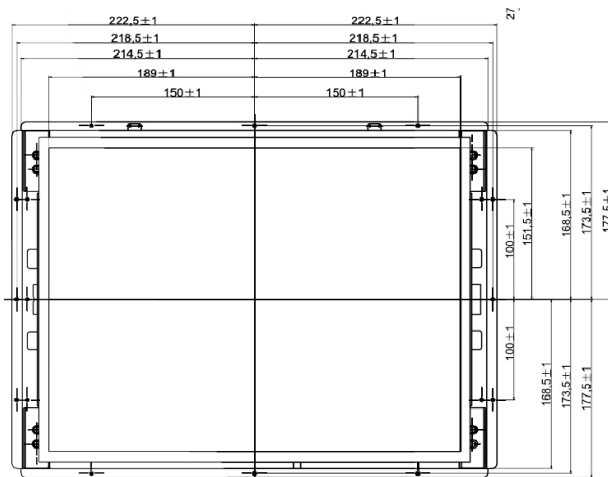

UNIT: mm

